Energizer
Western European Region
+ 44 (0) 208 920 2306
www.energizer.eu

Ultimate (LR6)

AA

Industry Standard Dimensions

(millimeters)

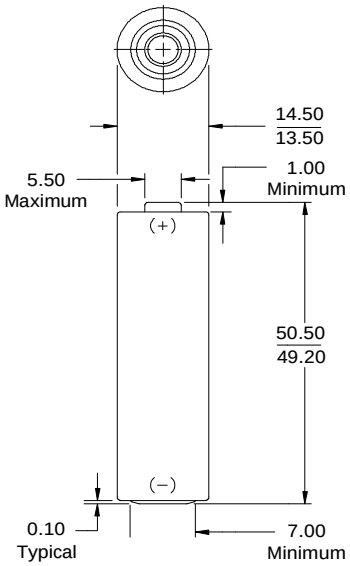

Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) No added mercury or cadmium
Designation:	IEC-LR6
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)*
Operating Temp:	-18°C to 55°C
Typical Weight:	23.0 grams
Typical Volume:	8.1 cubic centimeters
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

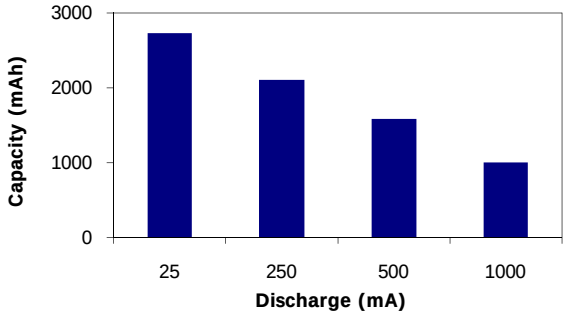

Industry Standard Testing (21°C):

CD/GAMES
250 mA 1 hr/day

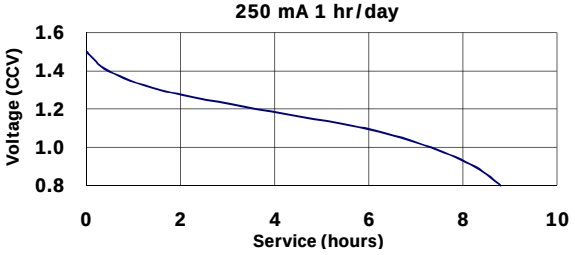

PHOTOFLASH
1K mA 10 sec/min 1 hr/day

DIGITAL CAMERA
1.5K/.65K mW 2/28 sec - 10x hr

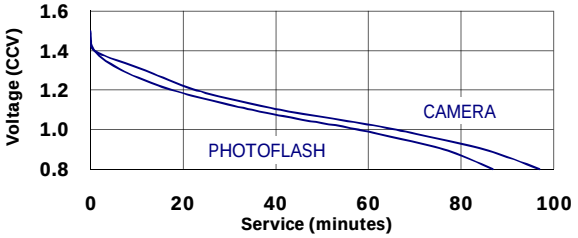

Battery Selection Indicator

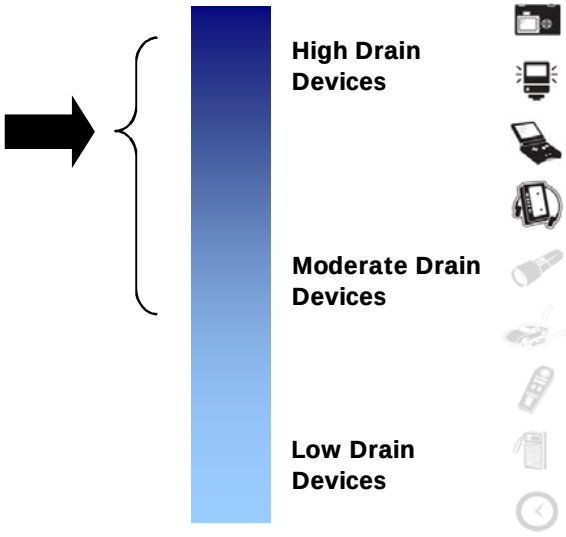

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.